




IQ Wave SP

Komfort ohne Kompromisse für Büros und Schulen. Eine logische Erweiterung der IQ Wave-Familie für die Anbau- und Pendelmontage

- Design: Form folgt Funktion. Die schlichte, fließende Linienführung kreiert eine moderne und simple Ästhetik.
- Optiken: Innovative, von Thorn patentierte Optik mit MV-Technologie für hervorragend gleichmäßige Beleuchtung und ausgezeichneten Blendschutz. Direktes/indirektes Licht auf Gesichtern und Wänden sorgt für eine komfortable, kommunikative Arbeitsumgebung.
- Steuersysteme: Integrierte Sensoren ermöglichen den Aufbau flexibler Steuersysteme nach Ihren Anforderungen. Steuerung der drahtlosen Lösung über App mit Bluetooth® 4.x - basicDim Wireless. Integrierte PIR- und Mikrowellensensoren sind verfügbar.
- Zusätzliche Optionen (Sensoren, Steuerungen, Funk, Verdrahtungen und Montagearten) sind auf myProduct verfügbar
- Versions adapted for mounting onto Contus trunking available.



Bei den Fotos, Zeichnungen und lichttechnischen Daten handelt es sich lediglich um Symbolbilder. Für genauere Produktangaben wählen Sie bitte ein Produkt aus.

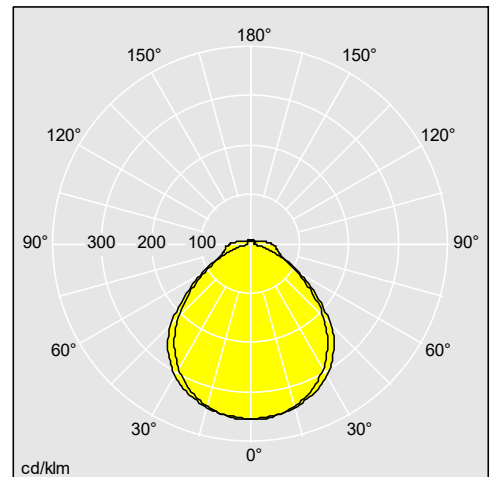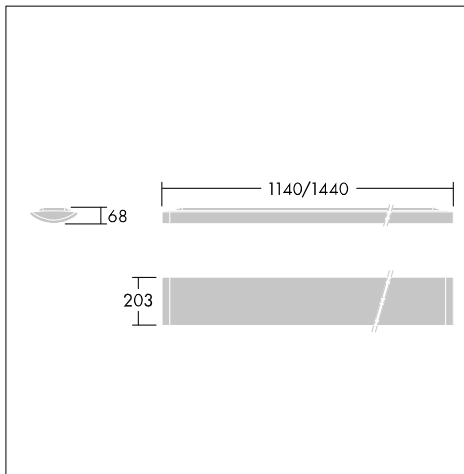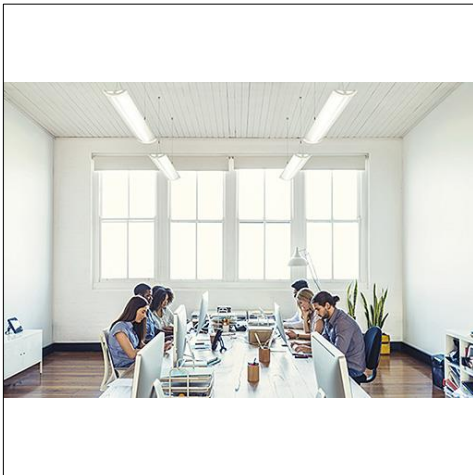

96629272

Material / Ausführung

Frame and end caps: polycarbonate.
 Diffuser and body: polycarbonate, aluminium heatsink.
 Gear tray: pre-coated white steel with polycarbonate endcaps.
 Contus adapter: pre-coated roll form steel, white (similar to RAL9016).

Installation/Montage

Suspended:
 Suitable for suspension with included Y suspension Kit and pre-assembled power cord.
 Surface:
 Suitable for direct surface or BESA mounting, central or end-cap cable entries.
 Continuous run:
 Standard products can be connected via optional continuous run Kit. Through wiring versions are available.
 Contus Trunking:
 Versions adapted for Contus trunking come pre-assembled, ready to fit quickly and easily with twist & lock mechanical/electrical connections.

IQ Wave SP

Bestellhinweis Varianten über myProduct erhältlich

Beschreibung	ILCOS Code	Sockel	Gewicht (kg)	SAP Code
IQ Wave Anbauleuchte, dimmbar				
IQ SURF S LED2600-830 HFIX	LED		4,1	96628940
IQ SURF S LED2600-840 HFIX	LED		4,1	96628941
IQ SURF S LED4250-830 HFIX	LED		4,1	96628942
IQ SURF S LED4250-840 HFIX	LED		4,1	96628943
IQ SURF L LED4250-830 HFIX	LED		5	96628944
IQ SURF L LED4250-840 HFIX	LED		5	96628945
IQ SURF L LED4900-830 HFIX	LED		5	96628946
IQ SURF L LED4900-840 HFIX	LED		5	96628947
IQ SURF L LED6700-830 HFIX	LED		5	96628948
IQ SURF L LED6700-840 HFIX	LED		5	96628949
IQ Wave Anbauleuchte, dimmbar (Varianten)				
IQ SURF L LED6700-830 HFIX ASY	LED		5,1	96629310
IQ SURF L LED4250-840 HFIX ASY	LED		5,1	96629836
IQ SURF L LED4250-830 HFIX ASY	LED		5,1	96629837
IQ SURF L LED4900-840 BC	LED		5,1	96631045
IQ Wave Anbauleuchte, dimmbar, Notlichtversion				
IQ SURF L LED6700-840 HFIX E3TX-C	LED		5,7	96629295
IQ SURF L LED6700-840 HFIX E3TX-B	LED		5,7	96629296
IQ SURF S LED2600-840 HFIX E3-B	LED		4,7	96629831
IQ SURF S LED4250-840 HFIX E3-B	LED		4,7	96629832
IQ SURF L LED4250-840 HFIX E3-B	LED		5,7	96629833
IQ SURF L LED4900-840 HFIX E3-B	LED		5,7	96629834
IQ SURF L LED6700-840 HFIX E3-B	LED		5,7	96629835
IQ Wave Anbauleuchte				
IQ SURF S LED2600-840 HF WH	LED		4	96629267
IQ SURF S LED4250-830 HF	LED		4	96629268
IQ SURF S LED4250-840 HF WH	LED		4	96629269
IQ SURF L LED4250-830 HF	LED		4,9	96629270
IQ SURF L LED4250-840 HF WH	LED		4,9	96629271
IQ SURF L LED4900-830 HF	LED		4,9	96629272
IQ SURF L LED4900-840 HF WH	LED		4,9	96629273
IQ SURF L LED6700-830 HF	LED		4,9	96629274
IQ SURF L LED6700-840 HF WH	LED		4,9	96629275
IQ SURF L LED6700-840 HF ASY	LED		4,9	96629309
IQ SURF S LED2600-830 HF	LED		4	96629266
IQ Wave Anbauleuchte, Notlichtversion				
IQ SURF S LED4250-840 HF E3-C	LED		4,6	96629292
IQ SURF S LED4250-840 HF E3-B	LED		4,6	96629294
IQ SURF S LED2600-840 HF E3-B	LED		4,1	92902800
IQ SURF L LED6700-840 HF E3-B	LED		4,6	92904837
IQ SURF L LED4900-840 HF E3 TW	LED		5	92901703
IQ SURF L LED4900-840 HF E3-B WH	LED		5	92906599

IQ Wave SP

Beschreibung	ILCOS Code	Sockel	Gewicht (kg)	SAP Code
IQ SURF S LED2600-840 HF E3-C	LED		4,1	92901823
IQ SURF L LED4250-840 HF E3-C	LED		5	92901912
IQ SURF L LED4900-840 HF E3-C	LED		5	92902259
IQ SURF L LED4900-830 HF E3-C WH	LED		5	92907054
IQ SURF L LED6700-840 HF E3TX-B WH	LED		4,6	92907855
IQ SURF L LED4250-840 HF E3-B	LED		5,5	92902793
IQ SURF L LED6700-840 HF E3TX-C WH	LED		4,6	92909350
IQ Wave Anbauleuchte, Sensor				
IQ SURF S LED4250-840 MWS	LED		4,1	96629300
IQ SURF L LED6700-840 MWS	LED		5,1	96629301
IQ SURF L LED6700-840 HFSX	LED		5,1	96629305
IQ Wave Pendelleuchte, dimmbar				
IQ SUSP S LED6700-840 HFIX ML5 WH	LED		4,4	96628957
IQ SUSP S LED2600-830 HFIX ML5	LED		4,4	96628950
IQ SUSP S LED2600-840 HFIX ML5	LED		4,4	96628951
IQ SUSP S LED4250-830 HFIX ML5	LED		4,4	96628952
IQ SUSP S LED4250-840 HFIX ML5 WH	LED		4,4	96628953
IQ SUSP S LED4900-830 HFIX ML5	LED		4,4	96628954
IQ SUSP S LED4900-840 HFIX ML5	LED		4,4	96628955
IQ SUSP S LED6700-830 HFIX ML5	LED		4,4	96628956
IQ Wave Pendelleuchte, dimmbar (Varianten)				
IQ SUSP S LED4900-840 BC ML3	LED		4,5	96631046
IQ SUSP S LED6700-840 BC ML3	LED		4,5	96631047
IQ Wave Pendelleuchte, dimmbar, Notlichtversion				
IQ SUSP S LED6700-840 HFIX E3TX ML6	LED		5,1	96629299
IQ SUSP S LED4250-840 HFIX E3 ML6	LED		5,1	96629839
IQ SUSP S LED4250-830 HFIX E3 ML6	LED		5,1	96629840
IQ SUSP S LED4900-840 HFIX E3 ML6	LED		5,1	96629841
IQ SUSP S LED4900-830 HFIX E3 ML6	LED		5,1	96629842
IQ SUSP S LED6700-840 HFIX E3 ML6	LED		5,1	96629844
IQ SUSP S LED6700-830 HFIX E3 ML6	LED		5,1	96629845
IQ Wave Pendelleuchte, dimmbar, Durchgangsverdrahtung				
IQ SUSP S LED2600-840 HFIX TW6	LED		5,2	92901541
IQ SUSP S LED4250-840 HFIX TW6	LED		4,7	92901672
IQ SUSP S LED4900-830 HFIX TW6	LED		4,3	92903966
IQ Wave Pendelleuchte, basicDIM, Notlichtversion				
IQ SUSP S LED6700-840 BC E3 ML4	LED		5	92902253
IQ Wave Pendelleuchte				
IQ SUSP S LED2600-830 HF ML3	LED		4,3	96629276
IQ SUSP S LED2600-840 HF ML3 WH	LED		4,3	96629277
IQ SUSP S LED4250-830 HF ML3	LED		4,3	96629278
IQ SUSP S LED4250-840 HF ML3 WH	LED		4,3	96629279

IQ Wave SP

Beschreibung	ILCOS Code	Sockel	Gewicht (kg)	SAP Code
IQ SUSP S LED4900-830 HF ML3	LED		4,3	96629280
IQ SUSP S LED4900-840 HF ML3 WH	LED		4,3	96629281
IQ SUSP S LED6700-830 HF ML3	LED		4,3	96629282
IQ SUSP S LED6700-840 HF ML3 WH	LED		4,3	96629283
IQ Wave Pendelleuchte, Notlichtversion				
IQ SUSP S LED4250-840 HF E3 ML4	LED		4,9	92901533
IQ SUSP S LED2600-840 HF E3 ML4	LED		4,3	92901779
IQ SUSP S LED6700-840 HF E3 ML4	LED		4,15	92901741
IQ SUSP S LED4900-840 HF E3 ML4	LED		6,5	92903056
IQ SUSP S LED2600-840 HF E3TX TW6	LED		5,2	92904117
IQ SUSP S LED6700-840 HF E3TX TW6	LED		8,5	92904594
IQ SUSP S LED4900-840 HF E3TX TW6 WH	LED		4,5	92911541
IQ Wave Pendelleuchte, Sensor				
IQ SUSP S LED6700-830 HFSX ML5	LED		4,5	96629307
IQ Wave Pendelleuchte, Durchgangsverdrahtung				
IQ SUSP S LED2600-840 HF TW6	LED		5,2	92901666
IQ Wave Zubehör				
REMOTECONTROL IR6			0,019	28000647
IQ SUSP connection kit standard WH			0,6	96629284
IQ SUSP connection kit sensor WH			0,7	96629285
IQ SURF connection kit standard WH			0,5	96629286
IQ SURF connection kit sensor WH			0,6	96629287
IQ SUSP connection kit emergency WH			0,6	96630057
IQ SURF connection kit emergency WH			0,6	96630058
IQ SUSP CEILING ROSE			1,5	96630258
IQ SURF ASYM BRA MWA			0,05	96630389
basicDIM ILD G2 PROGRAMMER			0,04	28003484
IQ Wave, Leermodule				
IQ WAVE INFILL 385 WH			1,4	96629772
IQ WAVE INFILL 565 WH			2	96629773
IQ WAVE INFILL 954 WH			3,2	96629774
IQ WAVE INFILL 1131 WH			3,8	96629775
IQ WAVE INFILL 1431 WH			4,7	96629776